



APAMPG-130

Request Samples



Check Inventory



44 x 37 x 14 mm
RoHS Compliant
MSL Level = N/A

Features

- GPS/GLONASS/Galileo Active Patch Antenna
- Low Profile with Size 44 x 37 x 14 mm
- High LNA Gain of 28 ± 3 dB
- Low Noise Figure: ≤ 1.55 dB
- Low Current Consumption
- Pre-Filtering for Enhanced Anti-Jamming Performance
- IP66 Weather-Proof Housing

Applications

- IoT / M2M
- GPS/GLONASS/Galileo Applications
- Fleet Management and Asset Tracking
- Telematics
- Unmanned Aerial Vehicle (UAV)
- Precision Agriculture

Product Image



**APAMPG-130**


Request Samples



Check Inventory

**44 x 37 x 14 mm****RoHS Compliant****MSL Level = N/A****GNSS Frequency Bands Covered**

GPS	L1 1575.42MHz	L2 1227.6MHz	L5 1176.45MHz	
GLONASS	G1 1598.06-1609.31MHz	G2 1242.93-1251.68MHz	G3 1202.025MHz	
Galileo	E1 1575.42MHz	E5a 1176.45MHz	E5b 1201.5MHz	E6 1278.75MHz
BeiDou	B1 1561MHz	B2 1207.14MHz	B3 1268.52MHz	
QZSS	L1 1575.42MHz	L2 1227.6MHz	L5 1176.45MHz	L6 1278.75MHz
IRNSS/NAVIC			L5 1176.45MHz	
SBAS	L1/E1/B1 1575.42MHz		L5/B2a/E5a 1176.45MHz	

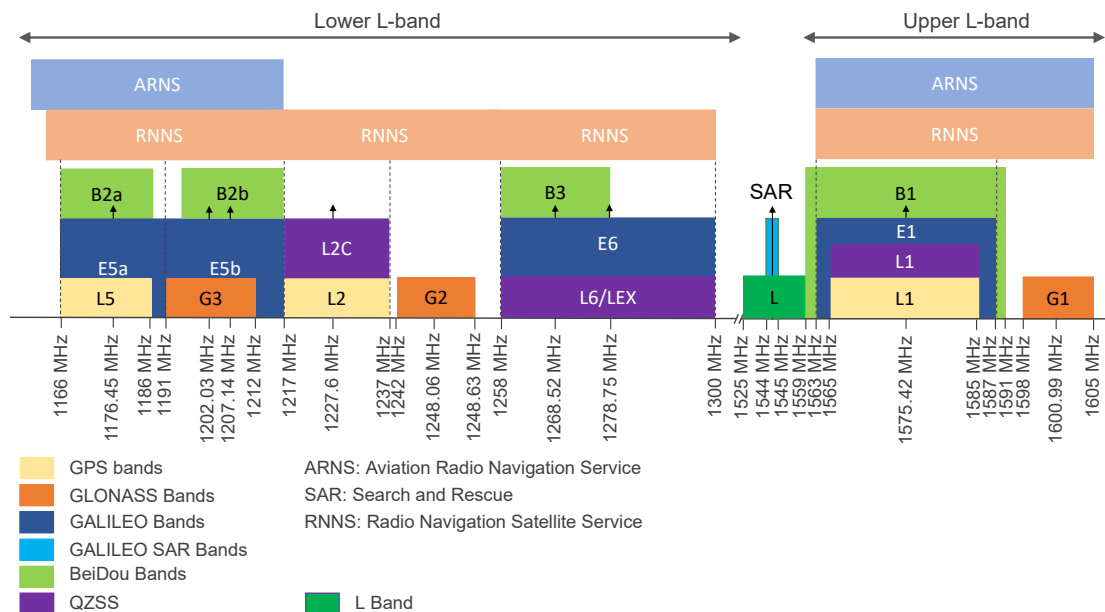

Frequency allocation: GNSS systems, upper L bands and lower L bands

**APAMPG-130**

Request Samples



Check Inventory



44 x 37 x 14 mm
RoHS Compliant
 MSL Level = N/A

Electrical Specification

Parameters			Units	Note
Antenna				
Frequency	1575.42±1.023 (L1/E1)	1601.02±1.15 (G1)	MHz	
VSWR	≤ 2		-	
Peak Gain	4.37	4.62	dBic	on 70 × 70 mm ground plane
Average Gain	-2.2	-1.8	dBic	
Maximum Efficiency	93.8	94.3	%	
Average Efficiency	87.2	93.6	%	
Polarization	RHCP		-	(Right Hand Circular Polarization)
Nominal Impedance	50		Ω	
LNA				
VSWR	2.0		-	
DC Input	3.0 ~ 5.0		V	
Gain	28 ± 3		dB	1545-1610MHz
Current Consumption	9 ± 3		mA	
Noise Figure	≤ 1.55		dB	

Please note: All measurement data is based on the standard configuration (conducted in free space unless otherwise specified).

**APAMPG-130**

Request Samples



Check Inventory

**44 x 37 x 14 mm**
RoHS Compliant
MSL Level = N/A**Mechanical Specification**

Parameter	Specification
Antenna Dimension	44 x 37 x 14 mm
Mounting Type ⁽¹⁾	Magnetic Mount
RF Connector ⁽¹⁾	SMA-J/SMA(Male)
Cable Type ⁽¹⁾	RG-174
Cable Length ⁽¹⁾	4M

(1): Fully customizable mounting type, RF Cable, and Connector

Environmental Specification

Parameter	Specification
Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C
IP Rating (housing)	IP66
RoHS Compliance	Yes
Relative Humidity	Up to 95%

**APAMPG-130**

Request Samples



Check Inventory

**44 x 37 x 14 mm**
RoHS Compliant
MSL Level = N/A**Ordering Information**

Part Number	Description	Connector Option
APAMPG-130	GPS/GLONASS/Galileo Active Patch Antenna with 4000 mm cable & SMA-J/SMA(Male) connector	SMA-J/SMA(Male)

Note: Different cable and connector configurations that are not listed may be available upon request via [Abracon online support](#)

**APAMPG-130**


Request Samples



Check Inventory



44 x 37 x 14 mm
RoHS Compliant
MSL Level = N/A

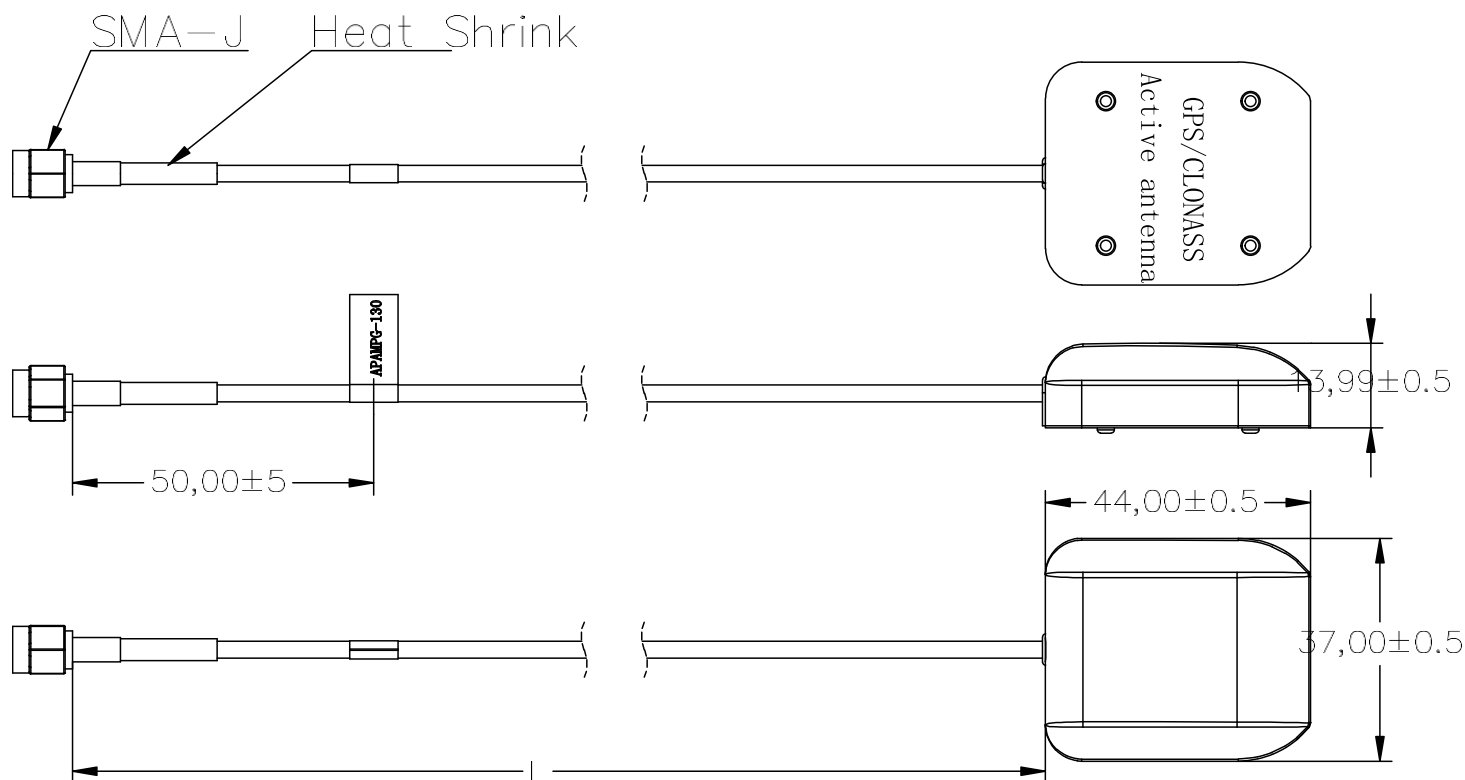Product Dimension*Unit: mm*



APAMPG-130

Request Samples




Check Inventory




44 x 37 x 14 mm
RoHS Compliant
MSL Level = N/A

Measurement Setup

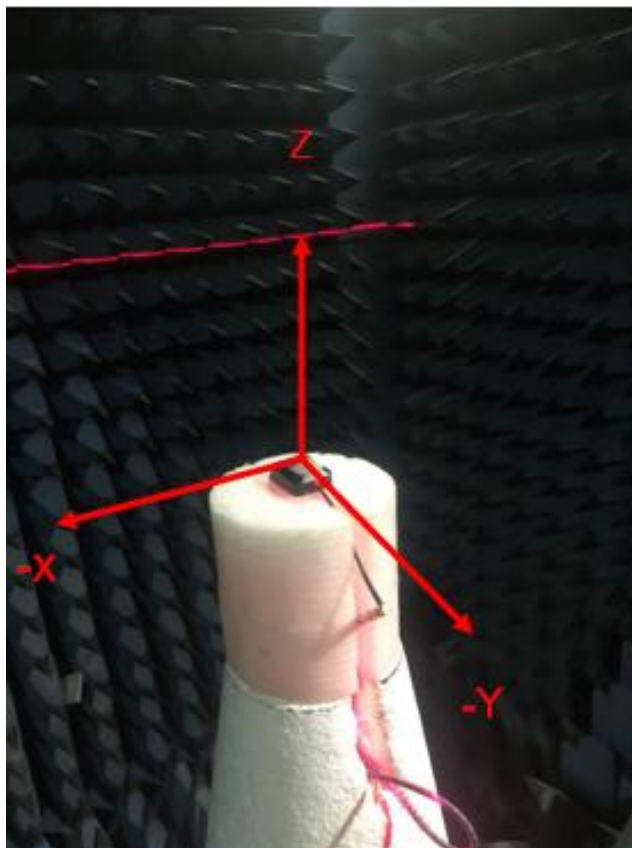

GNSS Block Diagram


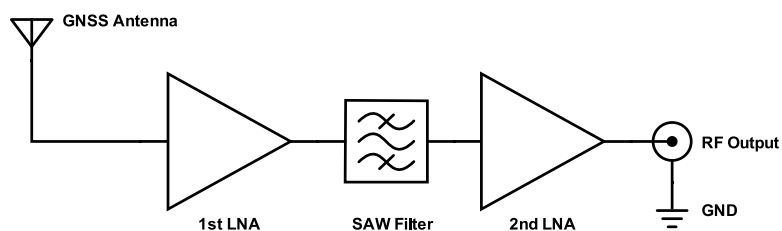


**APAMPG-130**

Request Samples



Check Inventory

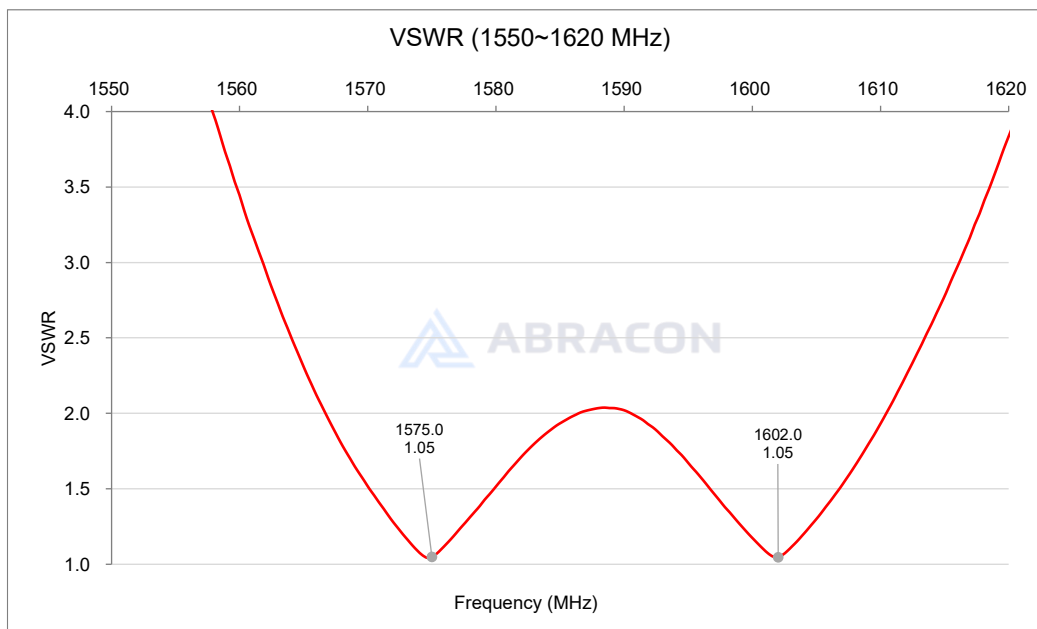
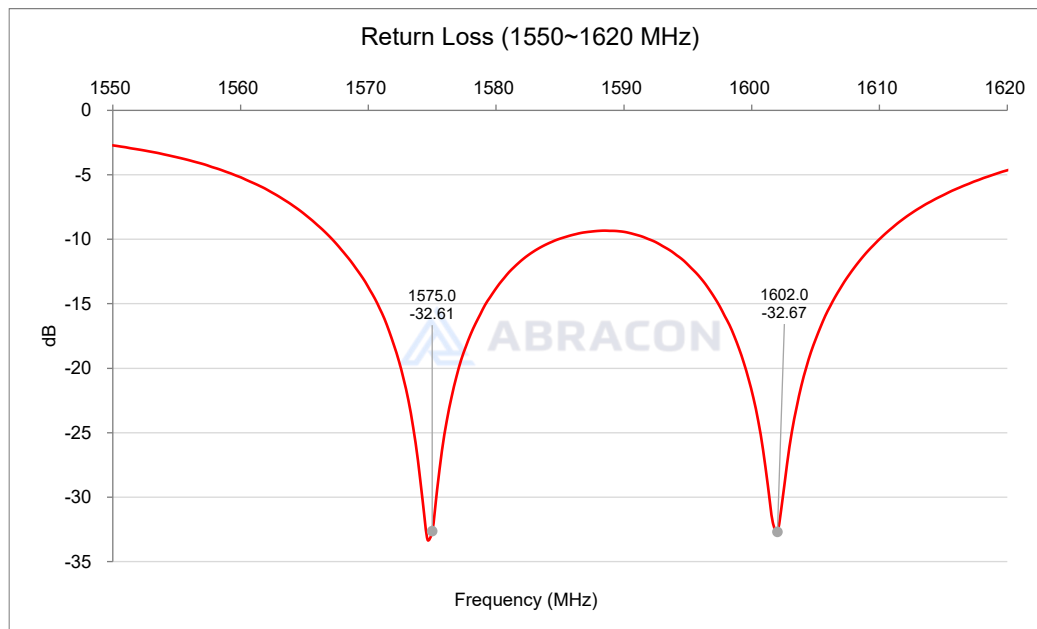
**44 x 37 x 14 mm**
RoHS Compliant
MSL Level = N/A**Reflection Characteristics – Return Loss & VSWR**

**APAMPG-130**

Request Samples



Check Inventory

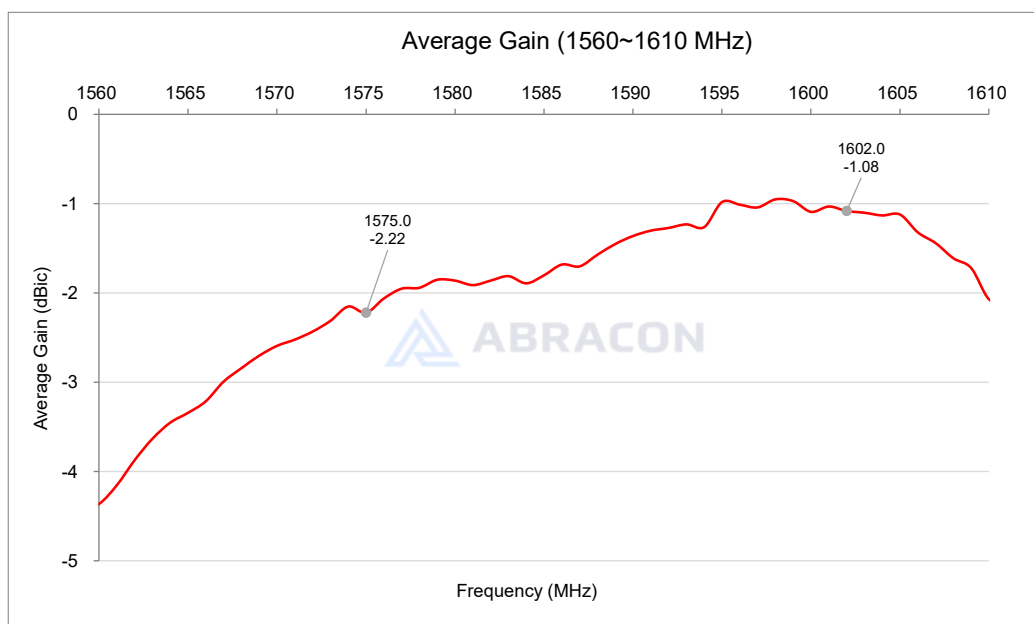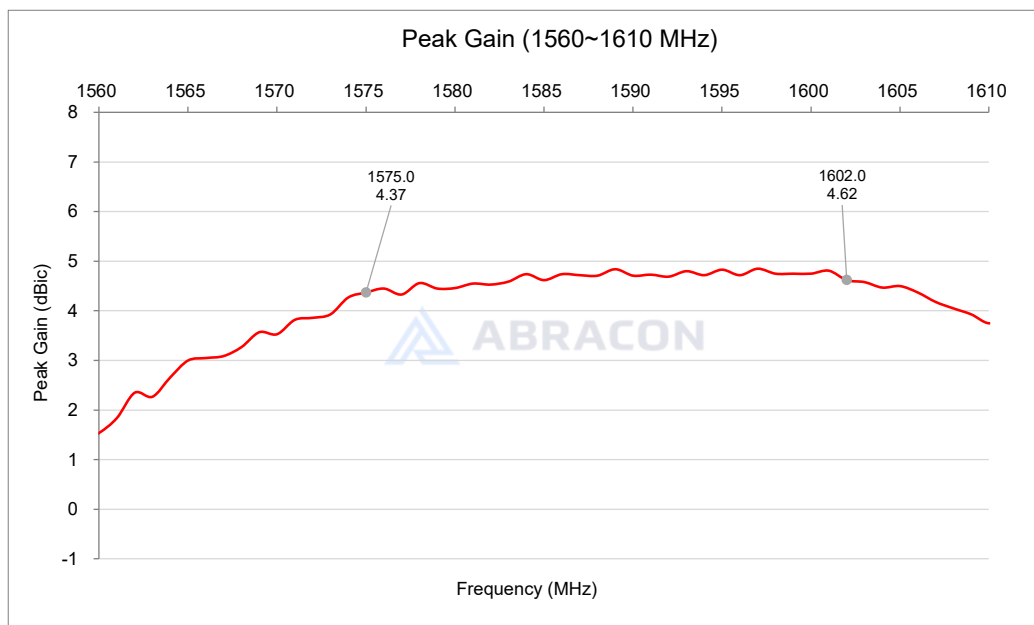**44 x 37 x 14 mm**
RoHS Compliant
MSL Level = N/A**Radiation Characteristics –Passive Gain**

**APAMPG-130**


Request Samples



Check Inventory



44 x 37 x 14 mm
RoHS Compliant
MSL Level = N/A

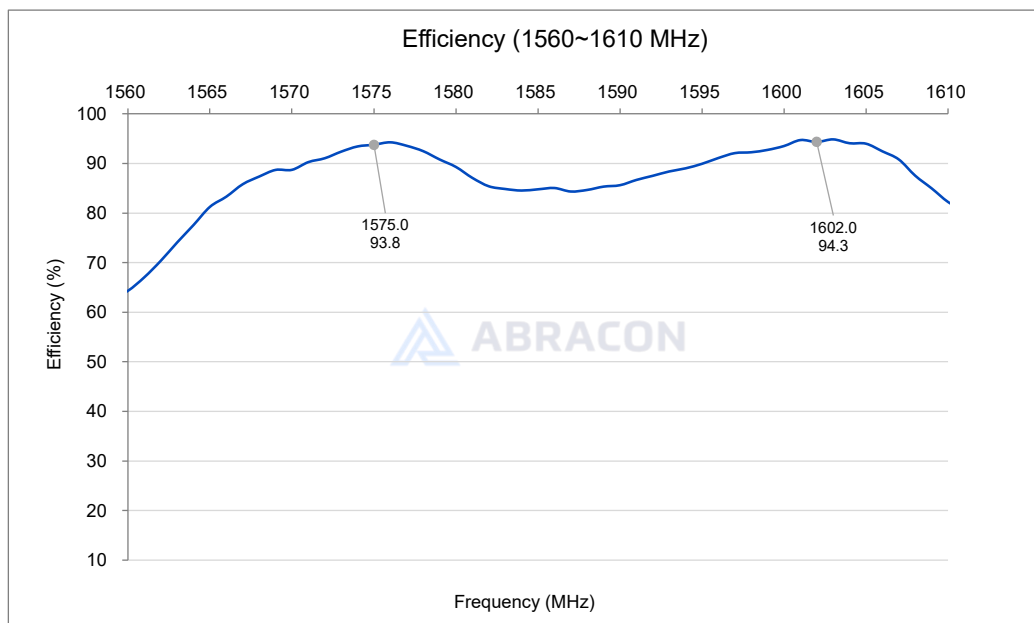Radiation Characteristics –Passive Efficiency

**APAMPG-130**


Request Samples



Check Inventory

**44 x 37 x 14 mm**
RoHS Compliant
MSL Level = N/A

LNA Characteristics –LNA Gain

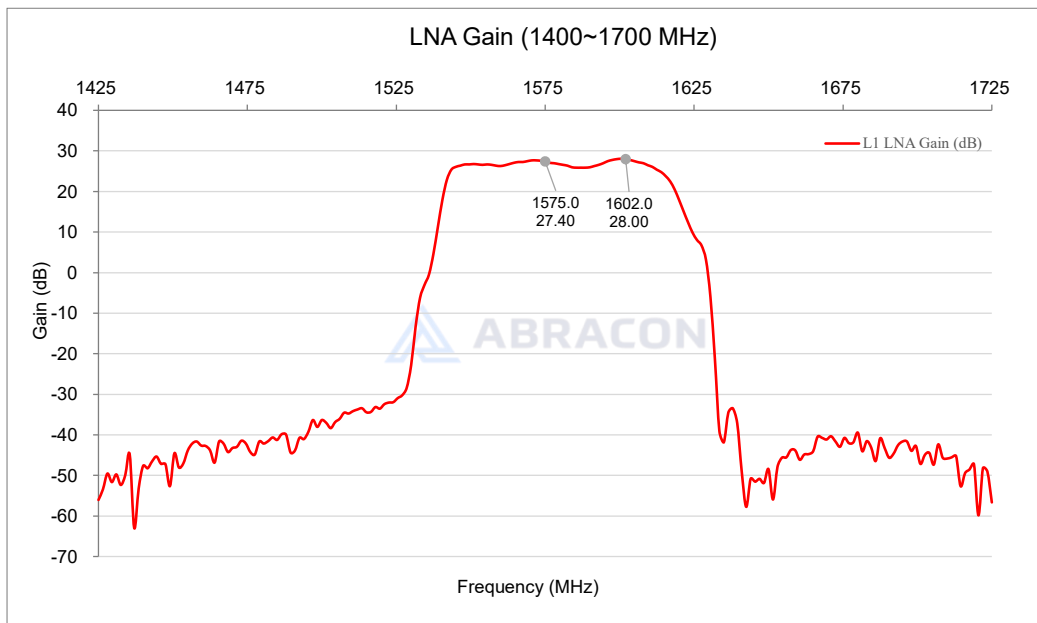

**APAMPG-130**

Request Samples




Check Inventory



44 x 37 x 14 mm
RoHS Compliant
MSL Level = N/A

LNA Characteristics –Noise Figure

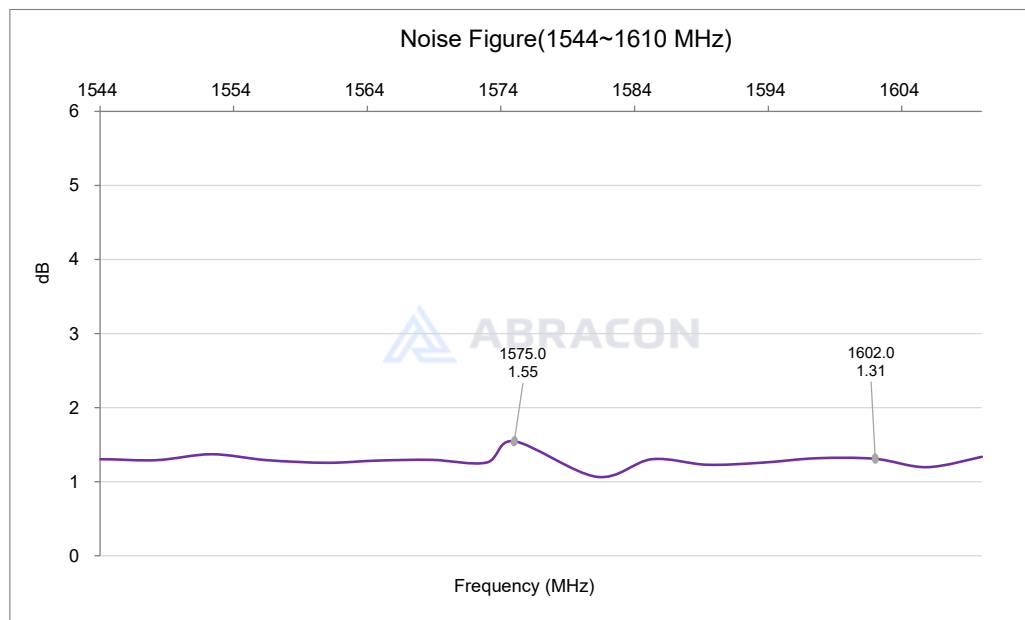



APAMPG-130

Request Samples





Check Inventory




44 x 37 x 14 mm
RoHS Compliant
MSL Level = N/A

Radiation Characteristics – 3D & 2D Pattern


1575MHz

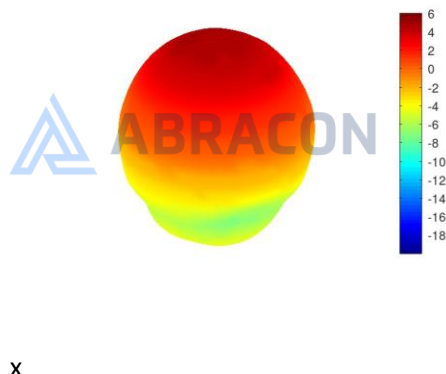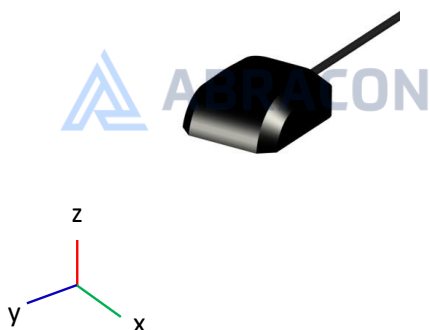


XY plane

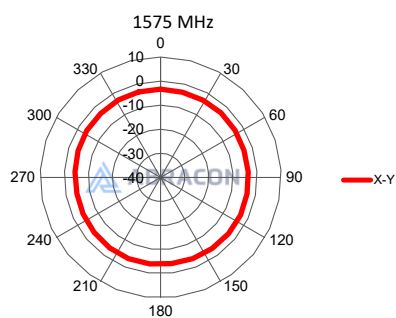

XZ plane

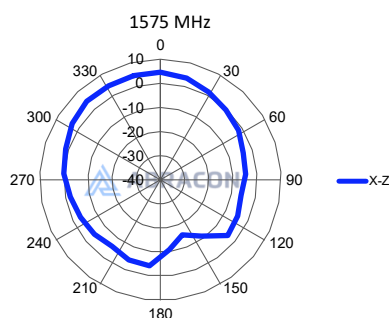

YZ plane

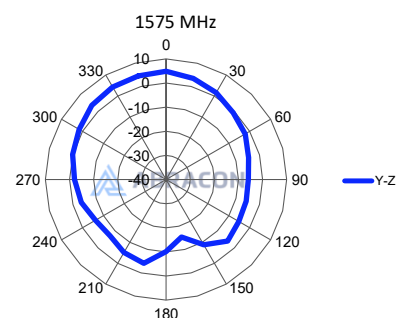

**APAMPG-130**



Request Samples




Check Inventory

**44 x 37 x 14 mm**
RoHS Compliant
MSL Level = N/A


1602MHz

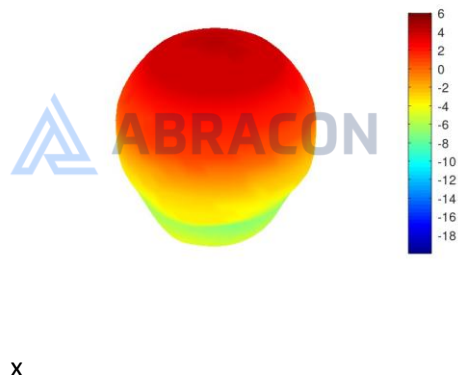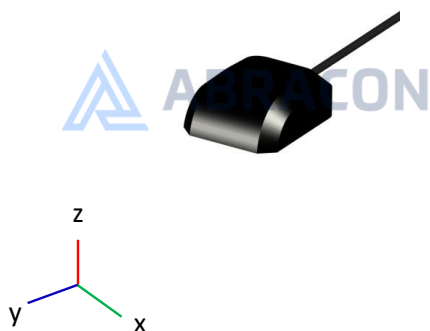


XY plane

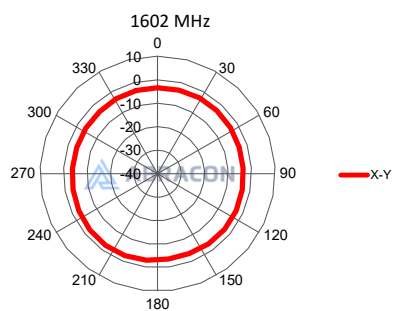

XZ plane

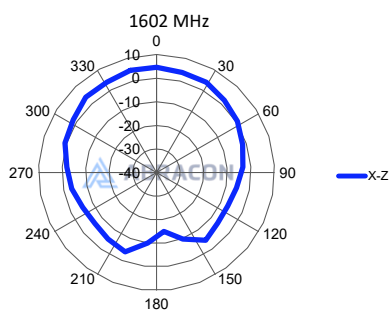

YZ plane

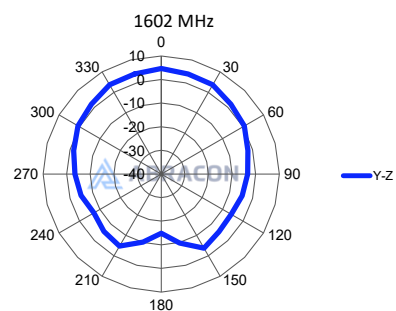



APAMPG-130

Request Samples



Check Inventory



44 x 37 x 14 mm
RoHS Compliant
MSL Level = N/A

Packaging

100 pcs antennas per carton

Dimensions: 630 x 460 x 105 mm

ATTENTION: Abracon LLC's products are Commercial-Off-The-Shelf ('COTS'), which are designed, intended, and validated for use in commercial, industrial, and automotive applications. The customer is responsible for testing and verifying the performance of an Abracon solution to meet their system-level requirements.



5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 08-05-25

ABRACON IS
ISO9001-2015
CERTIFIED