



PIN	FUNCTION
1	Vc
7	GND/Case
8	Output
14	VDD

Note: It is recommended to use an approximately 0.01 uF bypass capacitor between PIN 7 and 14.

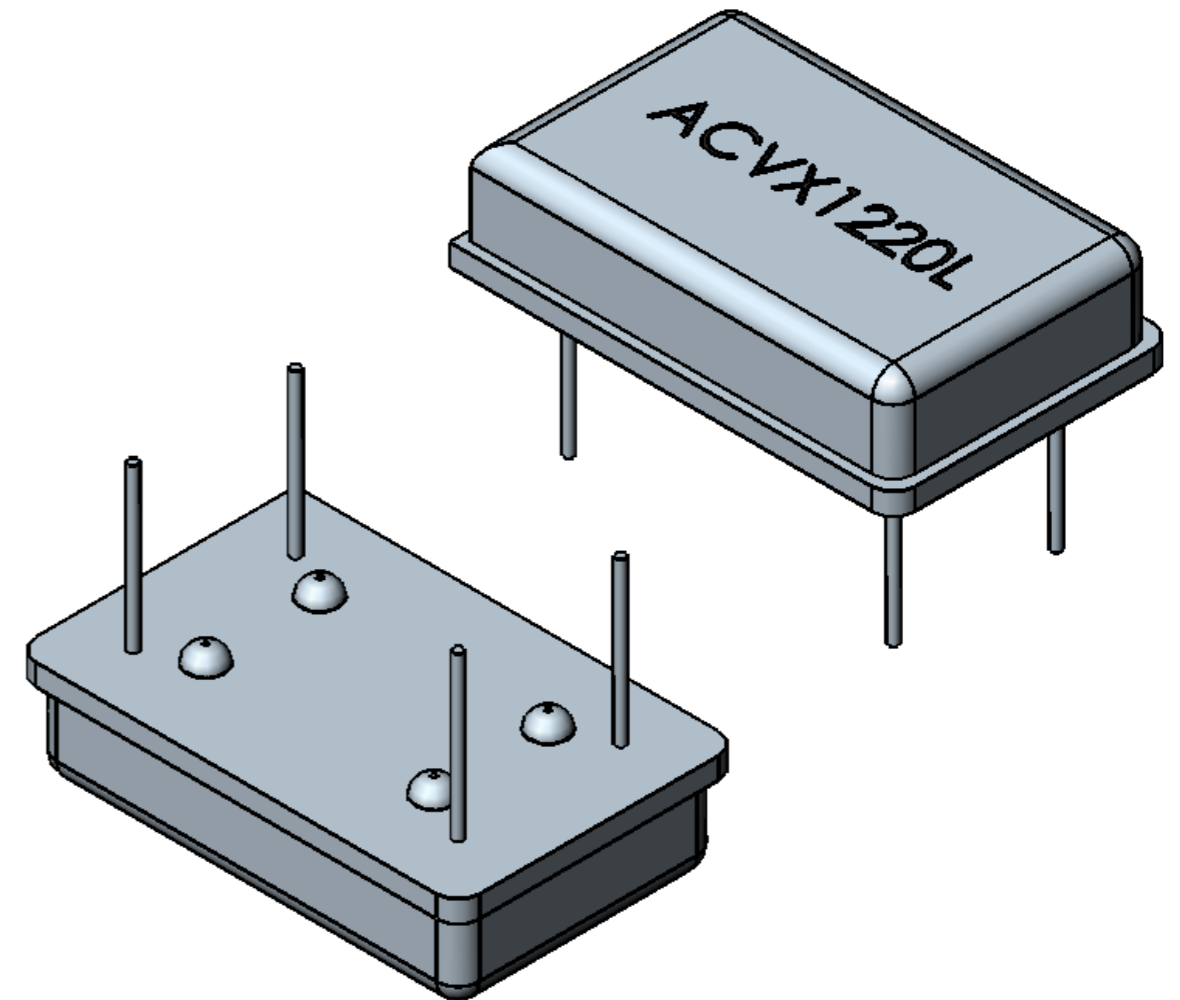

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCH(MM) SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:				FINISH:	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
NAME	SIGNATURE	DATE				 <b>ABRACON CORPORATION</b> 30332 Esperanza, Rancho Santa margarita, California 92688	
DRAWN	SAZVAT					TITLE: OSCILLATOR	
CHK'D	XXXXXX					DWG NO.	A3
APPV'D						<b>ACVX1220L</b>	
MFG						SCALE:4:1	SHEET 1 OF 1
Q.A					MATERIAL:		
					WEIGHT:		