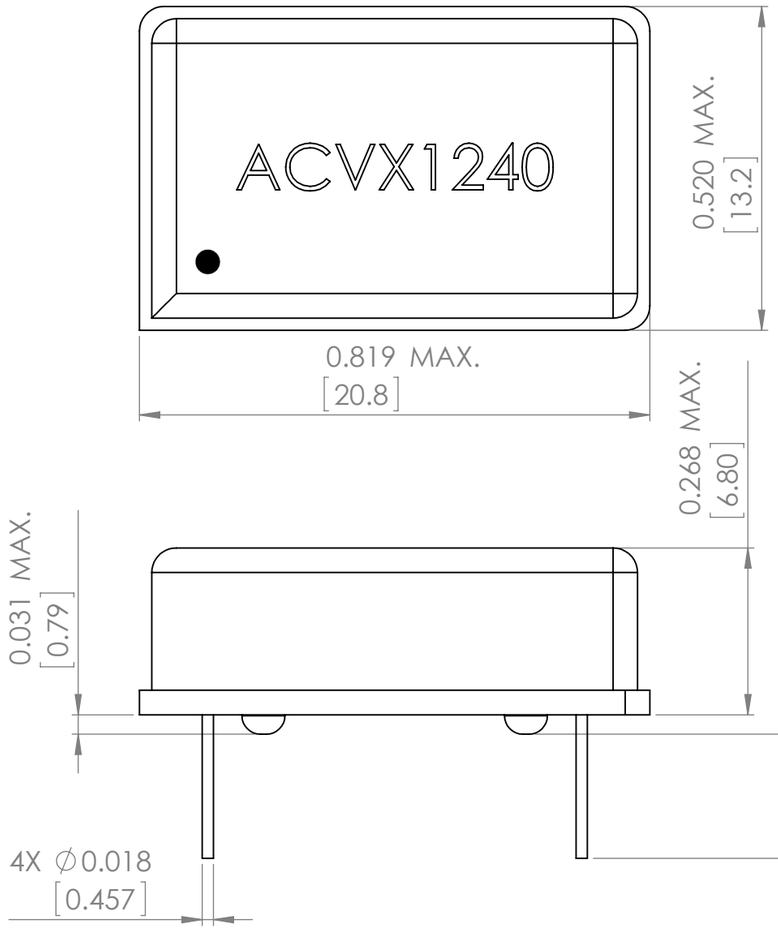

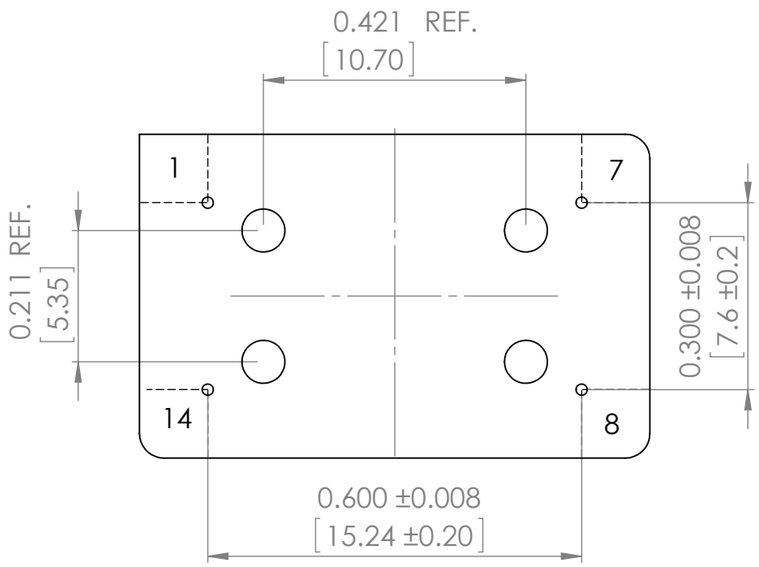

PIN	FUNCTION
1	Vc
7	GND/Case
8	Output
14	Vdd

Note: It is recommended to use an approximately 0.01uF bypass capacitor between PIN 7 and 14.

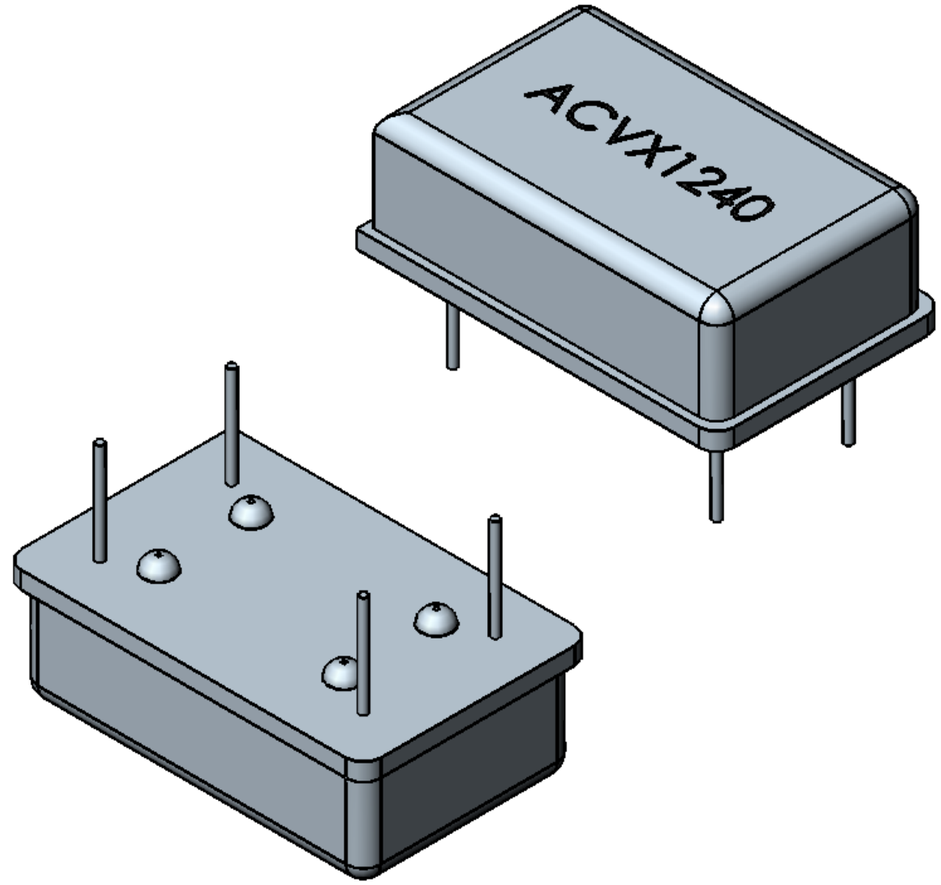

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCH(MM) SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	
	NAME	SIGNATURE	DATE			
DRAWN	SAAZVAT					
CHK'D	XXXXXX					
APPV'D						
MFG						
Q.A				MATERIAL:		
				WEIGHT:		

DO NOT SCALE DRAWING | REVISION -

ABRACON CORPORATION

30332 Esperanza, Rancho Santa margarita, California 92688

TITLE: OSCILLATOR

DWG NO. ACVX1240 | A3

SCALE:4:1 | SHEET 1 OF 1