



AEACBK189085-MLWFGL5



189.0 x 182.0 x 85.0 mm
RoHS/RoHS II Compliant
MSL = Not Applicable

Features

- 5 cabled combo antenna
- 2 x 4G/LTE
- WiFi 2.4/5 GHz
- AM/FM
- Active GPS L1+L5
- Active GPS with LNA gain of 28 dB
- RHCP for GNSS
- Linear polarized LTE and WiFi and AM/FM
- IP67 rated
- Screw mount

Applications

- 4G/LTE/3G/2G/GSM applications
- GNSS/GPS L1/L5 applications
- Gateways and routers
- WiFi 2.4/5 GHz
- Telematics
- M2M
- IoT and Industrial IoT
- Geolocation and tracking
- Transportation and agriculture
- Smart city

Electrical Specifications

GPS Antenna

Parameters	Min.	Typ.	Max.	Units	Notes
Operating Frequency Range		L1: 1575.42		MHz	
		L5: 1176.00			
VSWR			2		
Polarization	RHCP				
Impedance		50		Ω	
LNA Gain	26	28	30	dB	
LNA Noise Figure			1.5	dB	
Supply Voltage	3		5	V	DC
Current Consumption			15	mA	

LTE MIMO Antenna

Parameters	Min.	Typ.	Max.	Units	Notes
Operating Frequency Range	698		960	MHz	
	1710		2690		
	2900		3800		
VSWR			3		
Gain		4		dBi	
Polarization	Linear				
Impedance		50		Ω	



AEACBK189085-MLWFGL5



189.0 x 182.0 x 85.0 mm
 RoHS/RoHS II Compliant
 MSL = Not Applicable

Electrical Specifications Cont.

WiFi Antenna

Parameters	Min.	Typ.	Max.	Units	Notes
Operating Frequency Range	2400		2483.5	MHz	
	4900		5925		
VSWR			2.5		
Gain		4		dBi	
Polarization	Linear				
Impedance		50		Ω	

AM/FM Antenna

Parameters	Min.	Typ.	Max.	Units	Notes
Operating Frequency Range	520		1629	kHz	
	76		108	MHz	
VSWR			2.5		
Gain	AM	1 ± 3		dBi	
	FM	8 ± 3			
Polarization	Linear				
Impedance		50		Ω	
Supply Voltage	9		16	V	DC

Mechanical Specification

Parameters	Description	Notes
Cable Type	RG-174	
Cable Length	3M	
Connector	SMA + DIN	
Material	PC / ABS	
Mounting Method	Screw	



AEACBK189085-MLWFGL5




189.0 x 182.0 x 85.0 mm
 RoHS/RoHS II Compliant
 MSL = Not Applicable

Environmental Specification

Parameters	Description
Operating Temperature	-40°C to +85°C
Relative Humidity	Up to 95 %
Ingress Protection	IP67 (excluding cable outlet)
Vibration	10 ~ 55 Hz with 1.5 mm amplitude 2 hours

Product Dimension

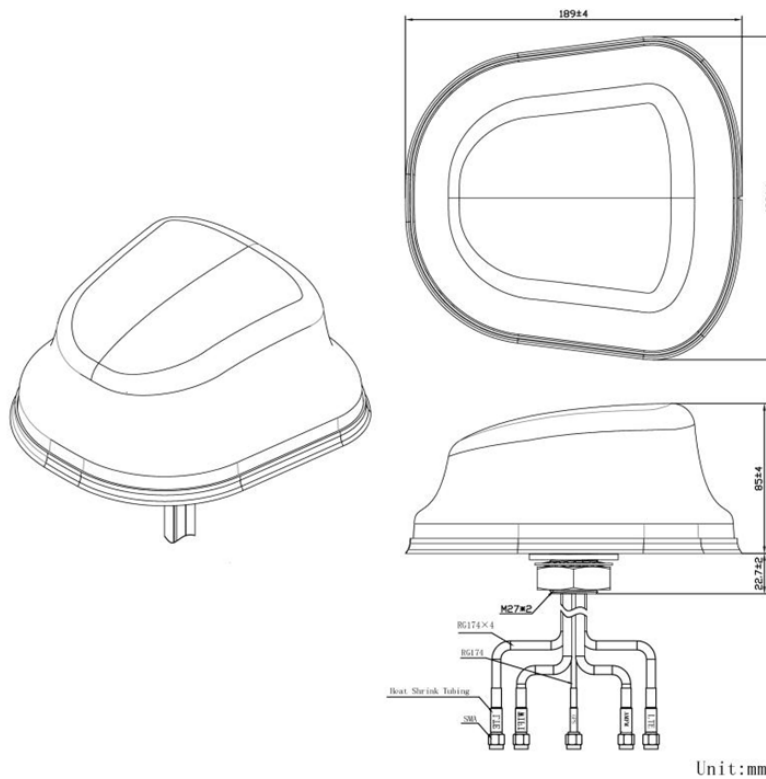




AEACBK189085-MLWFGL5




189.0 x 182.0 x 85.0 mm
 RoHS/RoHS II Compliant
 MSL = Not Applicable

VSWR

GPS Antenna

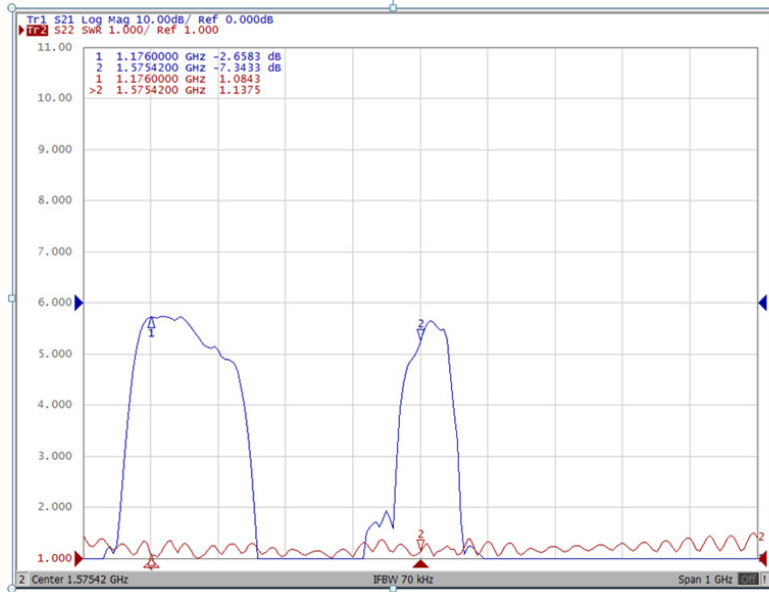

FM Antenna

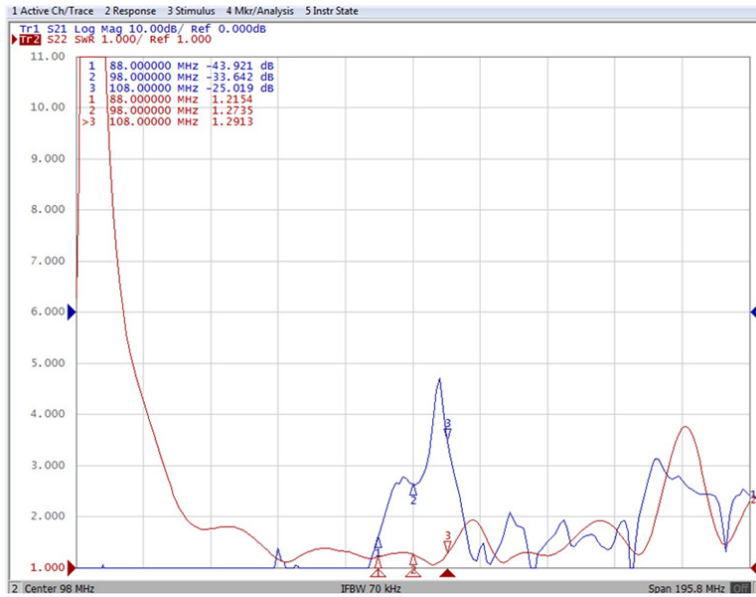




AEACBK189085-MLWFLG5




189.0 x 182.0 x 85.0 mm
 RoHS/RoHS II Compliant
 MSL = Not Applicable

VSWR

WiFi Antenna

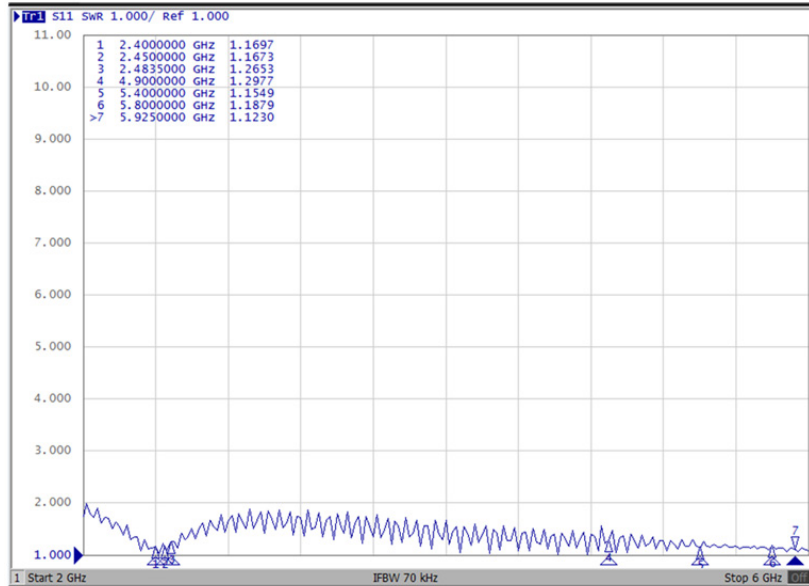

LTE MIMO Antenna

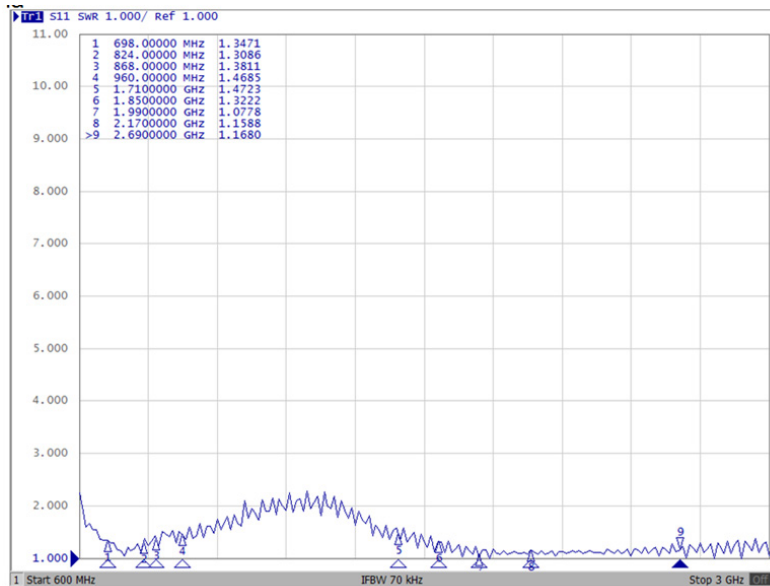



AEACBK189085-MLWFGL5



189.0 x 182.0 x 85.0 mm
 RoHS/RoHS II Compliant
 MSL = Not Applicable

Gain & Efficiency

Frequency	Efficiency	Gain (dBi)
WiFi		
2400	0.59	3.4
2450	0.63	3.79
2483.5	0.61	3.97
4900	0.58	-0.83
5400	0.61	-1.13
5800	0.57	-0.75
5925	0.57	-1.11
LTE		
698	0.62	3.35
824	0.64	2.95
868	0.66	4.05
960	0.59	2.45
1710	0.62	1.39
1850	0.57	1.43
1990	0.57	2.71
2170	0.63	1.24
2690	0.56	0.27

Radiation Pattern






AEACBK189085-MLWFGL5




189.0 x 182.0 x 85.0 mm
RoHS/RoHS II Compliant
MSL = Not Applicable

Radiation Pattern


GPS L1 Antenna (1575 MHz)




XY-PLANE



XZ-PLANE

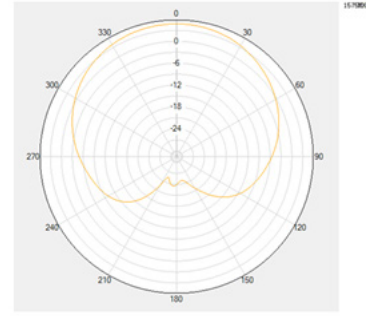

YZ-PLANE

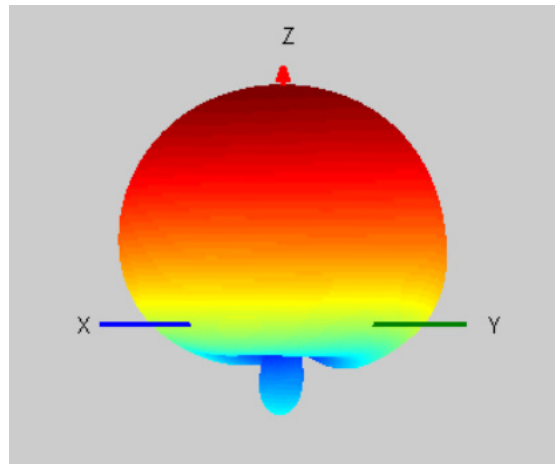




AEACBK189085-MLWFGL5




189.0 x 182.0 x 85.0 mm
RoHS/RoHS II Compliant
MSL = Not Applicable

Radiation Pattern


GPS L5 Antenna (1176 MHz)




XY-PLANE



XZ-PLANE



YZ-PLANE

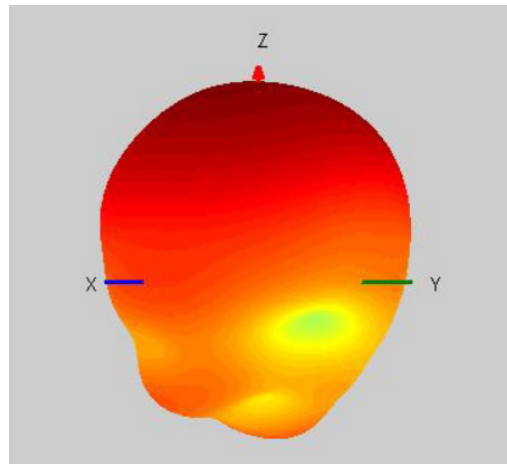




AEACBK189085-MLWFGL5




189.0 x 182.0 x 85.0 mm
RoHS/RoHS II Compliant
MSL = Not Applicable

Radiation Pattern


WiFi Antenna




XY-PLANE




XZ-PLANE

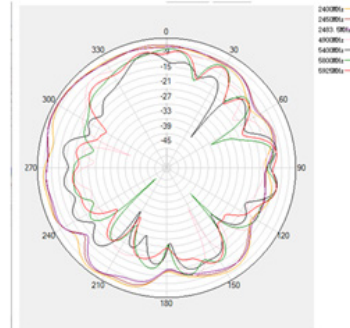


YZ-PLANE




2400MHz




2450MHz




2483.5MHz




4900MHz



5400MHz



5800MHz



5925MHz




AEACBK189085-MLWFGL5




189.0 x 182.0 x 85.0 mm
 RoHS/RoHS II Compliant
 MSL = Not Applicable

Radiation Pattern


LTE MIMO Antenna




XY-PLANE




XZ-PLANE




YZ-PLANE




698MHz




824MHz




868MHz




960MHz




1710MHz




1850MHz



1990MHz



2170MHz



2690MHz



AEACBK189085-MLWFGL5



189.0 x 182.0 x 85.0 mm
RoHS/RoHS II Compliant
MSL = Not Applicable

Packaging

A carton holds 8 pcs of antenna. Each carton is 43 x 43 x 34 cm and weighs 10 kg.

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 10-23-19

ABRACON IS
ISO9001-2015
CERTIFIED