



ANU

Request Samples



Check Inventory



4.0 x 3.7 mm

RoHS/RoHS II Compliant

MSL Level = 1

Features


- Very Low Cost
- Low profile antenna integrated along PCB edge
- Robust performance even when employed in solutions requiring “potting/coating/over-mold”
- Patented Technology (License Agreement)
- Wide Coverage: 6.24 – 8.25 GHz
- Low Return Loss: < -6.4 dB
- Low Group Delay

Applications

- Applications utilizing UWB Channels 5, 6, 8, and 9 (6.24 to 8.25 GHz)
- Wireless Remote Control
- Real-Time Location
- Digital Keys
- Hands-Free Payment
- Indoor Navigation
- Object Detection

Product Image

The Niche antenna (triangular) is implemented on an evaluation board in the image below.

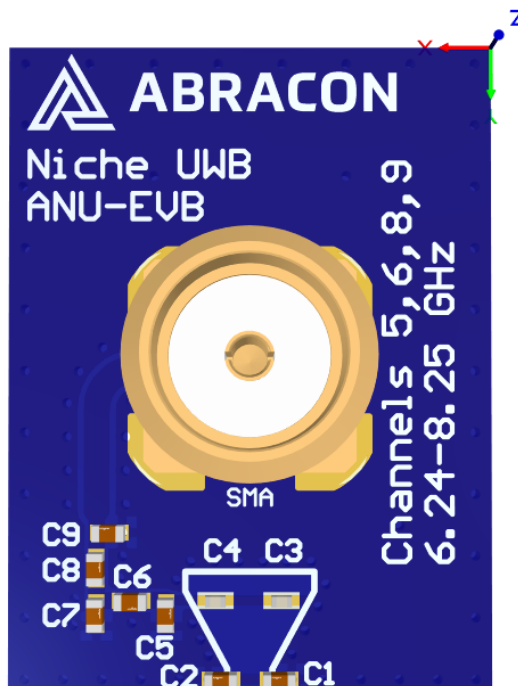



ANU

Request Samples



Check Inventory



4.0 x 3.7 mm

RoHS/RoHS II Compliant

MSL Level = 1

Electrical Specification

| Parameter | Specification | | | | Unit |
|---------------------|-----------------|-----------------|-----------------|-----------------|----------|
| | 5 | 6 | 8 | 9 | |
| UWB Channel | 5 | 6 | 8 | 9 | - |
| Operating Frequency | 6240.0 - 6739.2 | 6739.2 - 7238.4 | 7238.4 - 7737.6 | 7737.6 - 8236.8 | MHz |
| Return Loss | < -7.8 | < -6.4 | < -6.8 | < -6.5 | dB |
| Polarization | Linear | | | | - |
| Peak Gain | 4.4 | 2.9 | 3.3 | 3.0 | dBi |
| Efficiency | > -1.9 (64) | > -2.7 (54) | > -2.3 (59) | > -3.4 (46) | dB (%) |
| Impedance | 50 | | | | Ω |

Note: All measurements were conducted on the evaluation board in free space. Performance will vary depending on the ground plane, application, and environment.

Mechanical Specification

| Parameter | Specification |
|----------------------------|---|
| Antenna Dimension | 4.0 x 3.7 mm |
| Evaluation Board Dimension | 15 x 20 mm |
| Mounting Type | N/A: The antenna is implemented in the customer layout design under license agreement |

Product Dimensions

The triangular Niche antenna cutout is 4.0 by 3.7 mm in size, see dimensions in millimeters below.

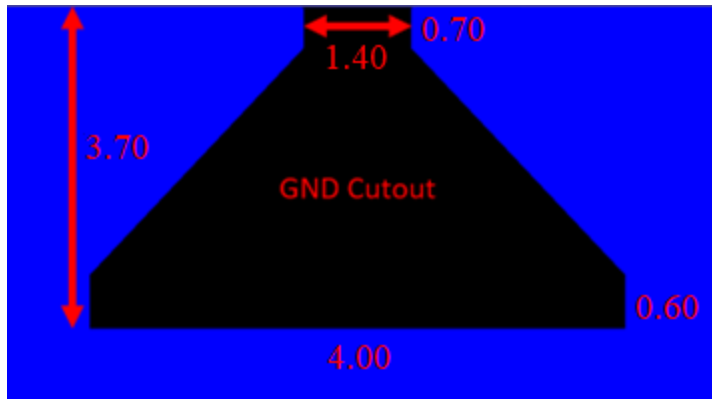


Image not to scale.

Licensing Information

The Niche concept is an Abracon patented technology that is sold through licensing. License agreement information, terms and conditions, and design advice are provided upon request. Please send all requests to niche@abracon.com



5101 Hidden Creek Ln Spicewood TX 78669
 Phone: 512-371-6159 | Fax: 512-351-8858
 For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 01-04-23

ABRACON IS
 ISO9001-2015
 CERTIFIED



ANU

Request Samples



Check Inventory




4.0 x 3.7 mm

RoHS/RoHS II Compliant


MSL Level = 1

Measurement Setup

The antenna measurements were all done in free space, with the Niche antenna implemented on its evaluation board that has a PCB size of 15 by 20 (X by Y) mm:

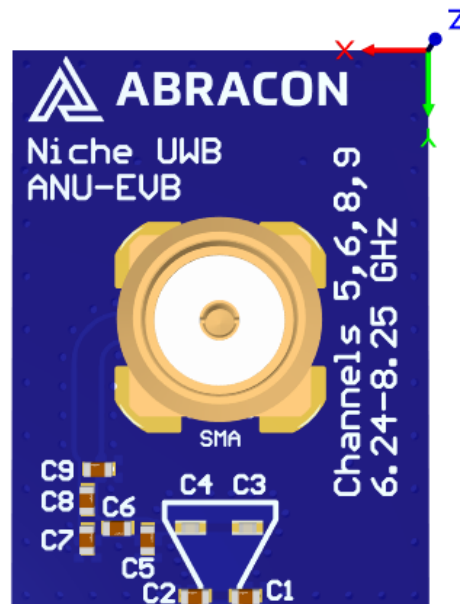

Reflection Characteristics – Return Loss

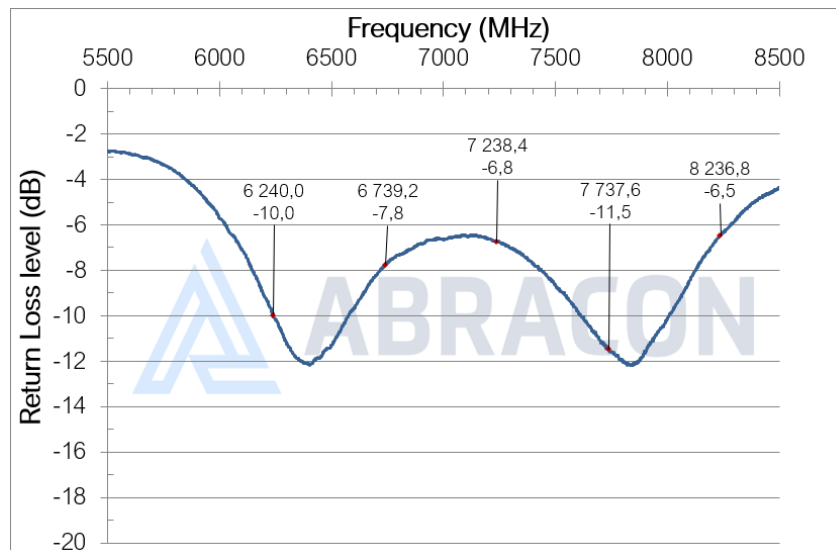



ANU

Request Samples



Check Inventory




4.0 x 3.7 mm


RoHS/RoHS II Compliant

MSL Level = 1

Radiation Characteristics – Total Efficiency

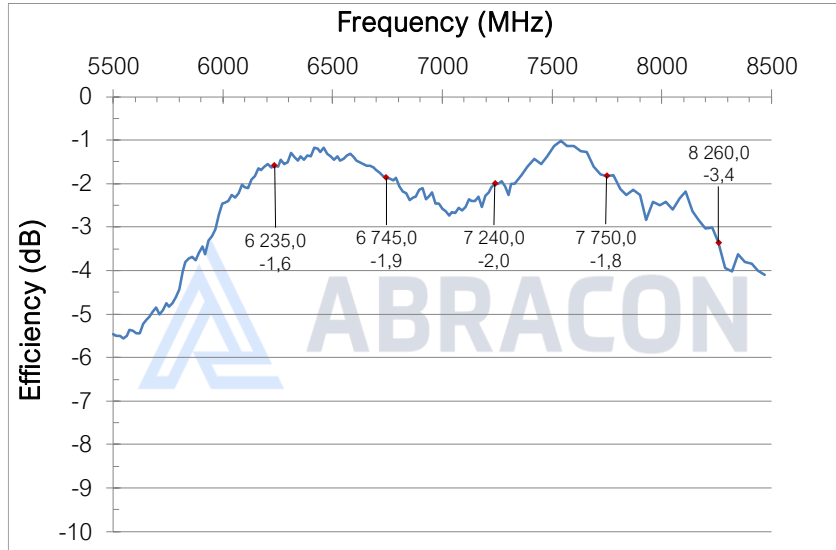

Radiation Characteristics – Maximum Gain

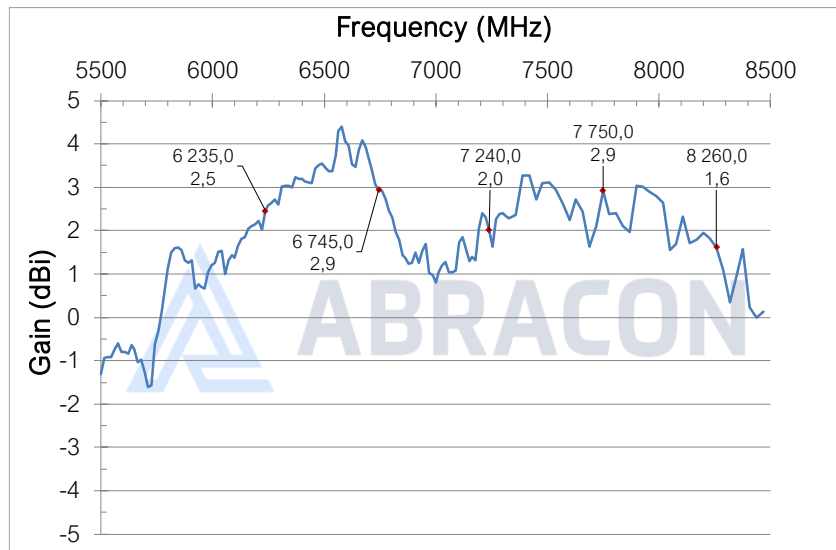



ANU

Request Samples




Check Inventory



4.0 x 3.7 mm
RoHS/RoHS II Compliant
MSL Level = 1

Radiation Characteristics – Group Delay

Two identical antennas were placed a distance d_{sep} apart in an anechoic chamber. The Group Delay, τ_{GD} , is then calculated from the transmission S-parameter (S12) by $\tau_{GD} = -\frac{1}{2 \cdot 360} \frac{\Delta\phi}{\Delta f}$, where $\Delta\phi$ is the change of phase over an aperture Δf . The maximum variation in group delay per channel, $\Delta_{max}\tau_{GD}$, can be found in the table below.

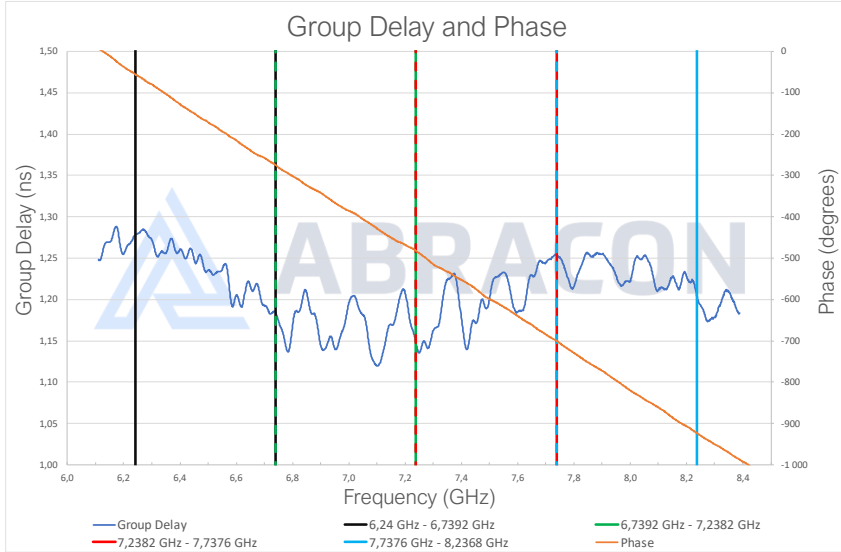

| Used Parameters | |
|-------------------------|---------------------------|
| Distance d_{sep} (cm) | Aperture Δf (MHz) |
| 50 | 220 |

| Maximum Group Delay Variation | | | |
|-------------------------------|-----------------|------------------|------------------------------|
| UWB Ch. | Freq. Low (GHz) | Freq. High (GHz) | $\Delta_{max}\tau_{GD}$ (ps) |
| 5 | 6240.0 | 6739.2 | 102 |
| 6 | 6739.2 | 7238.4 | 88 |
| 8 | 7238.4 | 7737.6 | 114 |
| 9 | 7737.6 | 8236.8 | 50 |



ANU

Request Samples



Check Inventory




4.0 x 3.7 mm

RoHS/RoHS II Compliant


MSL Level = 1

Radiation Characteristics – 2D Pattern @ 6490 MHz


XY-plane:

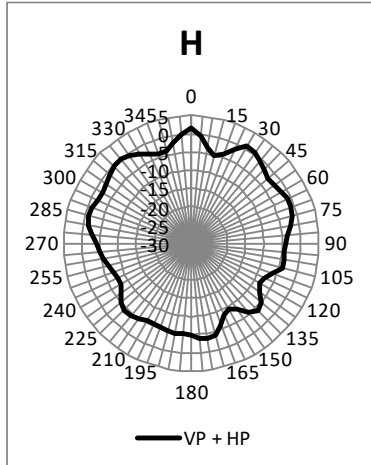




YZ-plane:

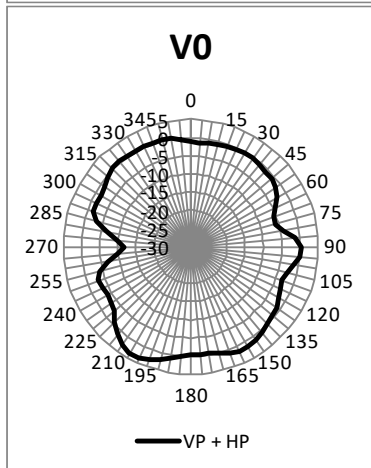

XZ-plane:

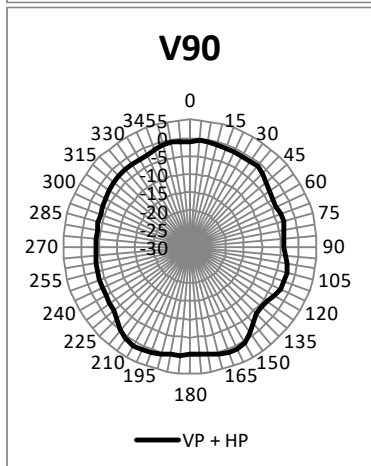

VP: Vertical Polarization
HP: Horizontal Polarization



Unit: dBi



ANU

Request Samples



Check Inventory




4.0 x 3.7 mm

RoHS/RoHS II Compliant



MSL Level = 1

Radiation Characteristics – 2D Pattern @ 6985 MHz



XY-plane:

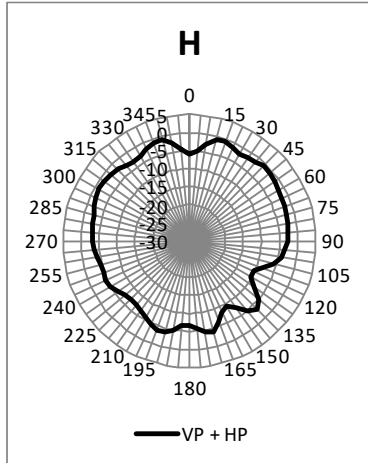

YZ-plane:

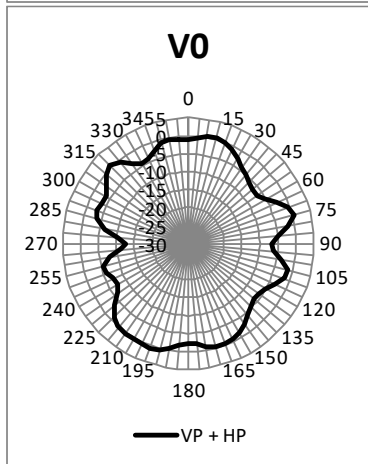

XZ-plane:

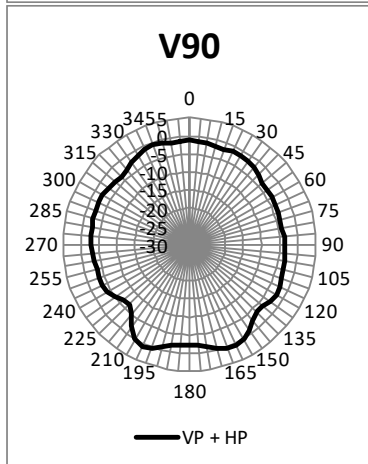

VP: Vertical Polarization
HP: Horizontal Polarization

Unit: dBi



ANU

Request Samples



Check Inventory




4.0 x 3.7 mm

RoHS/RoHS II Compliant



MSL Level = 1

Radiation Characteristics – 2D Pattern @ 7480 MHz



XY-plane:

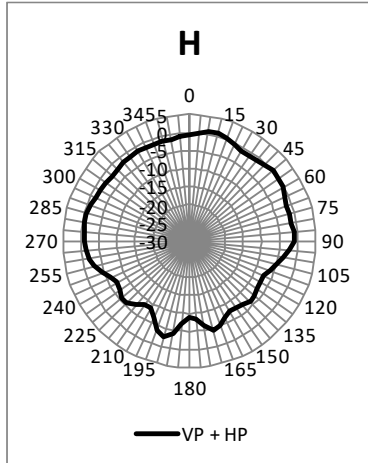

YZ-plane:

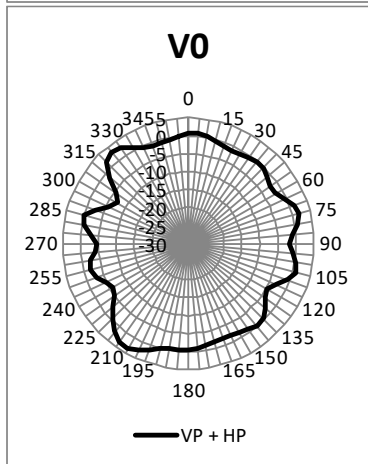

XZ-plane:

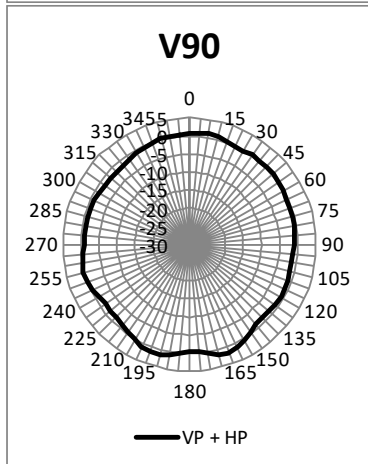

VP: Vertical Polarization
HP: Horizontal Polarization

Unit: dBi



ANU

Request Samples



Check Inventory




4.0 x 3.7 mm

RoHS/RoHS II Compliant



MSL Level = 1

Radiation Characteristics – 2D Pattern @ 7990 MHz



XY-plane:

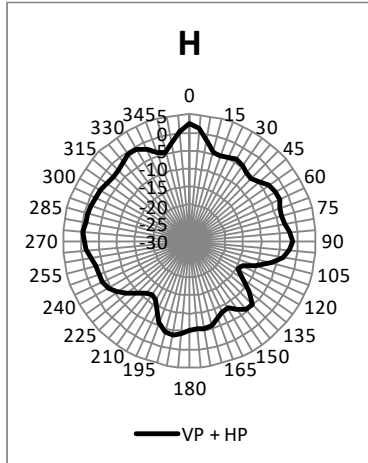

YZ-plane:

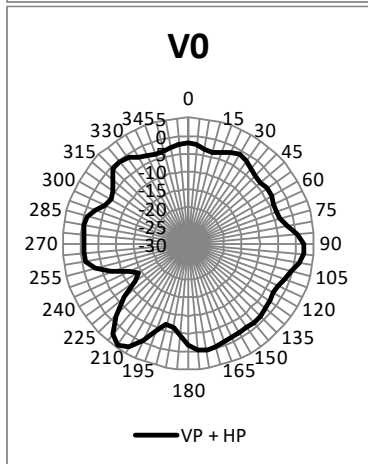

XZ-plane:

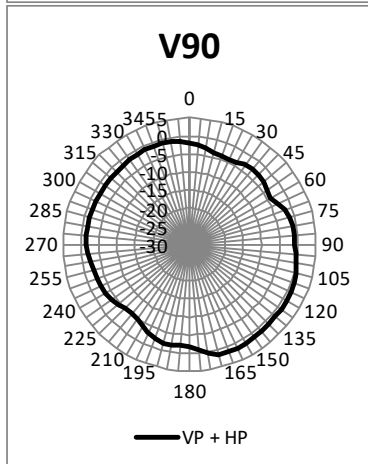

VP: Vertical Polarization
HP: Horizontal Polarization

Unit: dBi



ANU

Request Samples



Check Inventory




4.0 x 3.7 mm

RoHS/RoHS II Compliant


MSL Level = 1

Evaluation Board Outline & Matching Circuit

The evaluation board is developed to showcase the performance of the Niche antenna on a typical PCB and to simplify antenna testing and evaluation. It has a size of 15 x 20 mm and includes an SMA connector. The performance will vary with different PCB sizes. Abracon can offer support to optimize the antenna for specific applications.

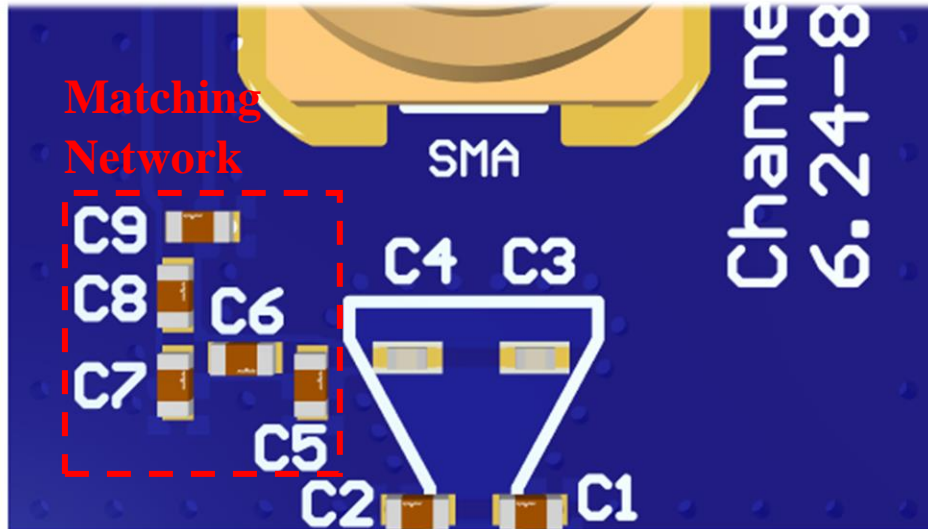

The evaluation board has a matching circuit implemented next to the antenna to enable optimization possibilities for the user. The component footprints in the matching network are sized for 0402 (1005 metric) SMD components. Components C1-C4 are part of the antenna and will be disclosed upon design-in.

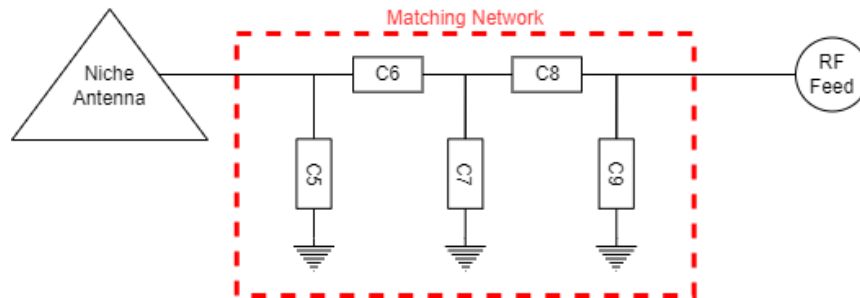

The standard tuning for the evaluation board is the following (can be replaced by equivalent):

C5 = 2.5nH (Murata LQW15AN2N5B00)

C8 = 8.4pF (GJM1555C1H8R4WB01)

C6 = 2.5nH (Murata LQW15AN2N5B00)

C9 = 1.4nH (Murata LQW15AN1N4C10)

C7 = 0.2 pF (Murata GJM1555C1HR20WB01)

However, it is common that the resonant frequency will shift during implementation in an arbitrary device. Therefore, this matching may be changed with other values/components/brands for compensation of such effects. This is further described in the General Implementation Guidelines section below.



ANU

Request Samples



Check Inventory



4.0 x 3.7 mm


RoHS/RoHS II Compliant

MSL Level = 1


General Implementation Guidelines for the Niche antenna

The antenna can be positioned in different ways, although there are some positions which are more beneficial. The left picture shows a typical PCB with examples on different antenna positions. The optimal position is option 1. Options 2 and 3 are also possible. The antenna must be placed along the PCB edge, i.e., it cannot be placed in the middle.

Antenna Positions:

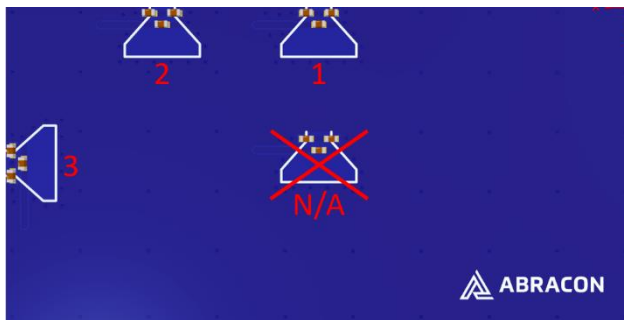

Triangular antenna cutout & via-structure:

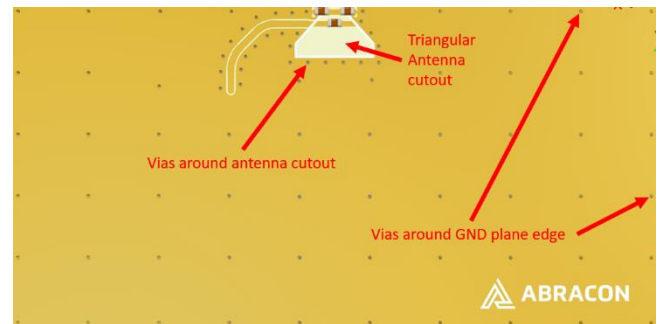

The triangular copper cutout needs to go through all the layers in the PCB stackup, meaning that there cannot be copper on any layer in this triangular area. It is also recommended to have a good via-structure around the antenna and the edge of the ground plane, see the right image above.

If other electrical components are positioned in the surrounding area of the antenna cutout, some impact on the antenna tuning and radiated performance may be expected. It is recommended that such components are distributed below a topographical slope that starts on PCB level at the antenna cutout, and slowly increases the height. In other words, small electrical components may be mounted close to the antenna if they do not enter the triangular copper cutout. This is a space-efficient solution which usually has low influence on the performance

It shall also be highlighted that plastic and metal parts in the near proximity of antennas may influence the antenna tuning and/or performance. This aspect should be noted as a general guideline for all antennas. The effects are difficult to estimate without detailed information, but it is common that a plastic housing above the antenna shifts the resonant frequency down. It is recommended to measure the antenna in the actual device after implementation and to implement a matching network on the antenna feed to adjust for the potential frequency shift.

The Niche antenna shows great performance when potted compared to other antenna solutions and has also shown good performance in proximity of metal and other harsh antenna environments.

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.