


Phase-Locked Clean-up ULPN VCXO with Low G-sensitivity

 **ESD Sensitive** 17.4 x 14.38 x 5.6 mm
Datasheet #2038B

Features

- Low G-sensitivity
- Low Phase Noise Similar to OCXO
- Compact SMD Package
- Low Power Consumption Independent on Ambient Temperature and no Warm-up
- Fast Ready

Applications

- Significantly improves Phase Noise of incoming signal
- Atomic Clocks
- GNSS Based Clocks
- Test And Measurement
- COTS/Dual use

Absolute Maximum Ratings

Parameters	Symbol	Condition	Min	Typ	Max	Unit	Notes
Input Break Down Voltage	Vcc		-0.5		5.5	V	Vcc = 5 V
Operating Temp.	To		-20		70	°C	
Operable Temp.	TO		-40		85	°C	
Storage temper.	Ts		-40		85	°C	

Electrical

Parameters	Symbol	Condition	Min	Typ	Max	Unit	Notes
Input Frequency	Fin			10.000 100.000		MHz	Option A Option B
Output Frequency	Fout		80	100.000	125	MHz	
Frequency Capture Range (APR)	ΔF/F	Overall	±100			ppb	
Allan Deviation		.01s to 1.0s		8E-11			
Frequency stability	ΔF/F	Locked	Equal to incoming signal				
Recommended MAX Input SSB Phase Noise	£(Δf)	10 Hz			-80	dBc/Hz	10 MHz, Option A
		100 Hz			-110		
		1 KHz			-130	dBc/Hz	100 MHz, Option B
		10 KHz			-140		
		100 KHz			-140		
		10 Hz			-70		
		100 Hz			-100		
		1 KHz			-120		
Input signal		CMOS	2			V	Swing
		Sine Wave	0		5	dBm	
Output SSB Phase Noise Improvement Compared to Input Phase Noise		1 Hz		20		dBc/Hz	Cannot improve beyond listed above noise floor
		10 Hz		40			
		100 Hz		50			
		1 KHz		50			
		10 KHz		50			
		100 KHz		50			
Output SSB Phase Noise Floor	£(Δf)	10 Hz		-95		dBc/Hz	
		100 Hz		-125			
		1 KHz		-152			
		10 KHz		-170			
		100 KHz		-172			
G-sensitivity		worst direction			±0.2	ppb/G	

All parameters for output frequency 100 MHz

Phase-Locked Clean-up ULPN VCXO with Low G-sensitivity



17.4 x 14.38 x 5.6 mm


Datasheet #2038B

Electrical (cont.)


Parameters	Symbol	Condition	Min	Typ	Max	Unit	Notes
Input Voltage	Vcc	Code 0 Code A	4.75 3.2	5.0 3.3	5.25 3.45	V	By special request
Power consumption	P			100		mW	Driving 50 Ohm code S
Spectral Purity		Subharmonics Spurious Harmonics		-70 -35	-50 -80 -30	dBc	Output Code S
Load	Internally AC coupled 50 Ohm (Sinewave) 10KOhm//15pF (CMOS/TTL)						
Lock Time				1		minute	
Output Power	Pout	Into 50 Ohm	9	11		dBm	Output Code S
Logic 1 (CMOS)	Voh		0.7Vref			V	Output Code T
Logic 0 (CMOS)	Vol				0.1Vref	V	Output Code T
Duty Cycle			45/55		55/45	%	Output Code T
Rise/Fall Time	Tr/Tf			4	5	ns	Output Code T
Lock Detect			Logic "1"				Can drive LED

Environmental and Mechanical

Parameter	Description
Operating temp. range	-20°C to 70°C Standard, Other options – see chart below
Mechanical Shock	Per MIL-STD-202, 30G, 11ms , survival
Vibration	Per MIL-STD-202, 5G to 2000 Hz, Survival
Soldering Conditions	See MAX reflow profile below; The device may be reflowed once. Reflowing upside down is not allowed. Hand soldering is highly encouraged. NO CLEAN assembly is recommended

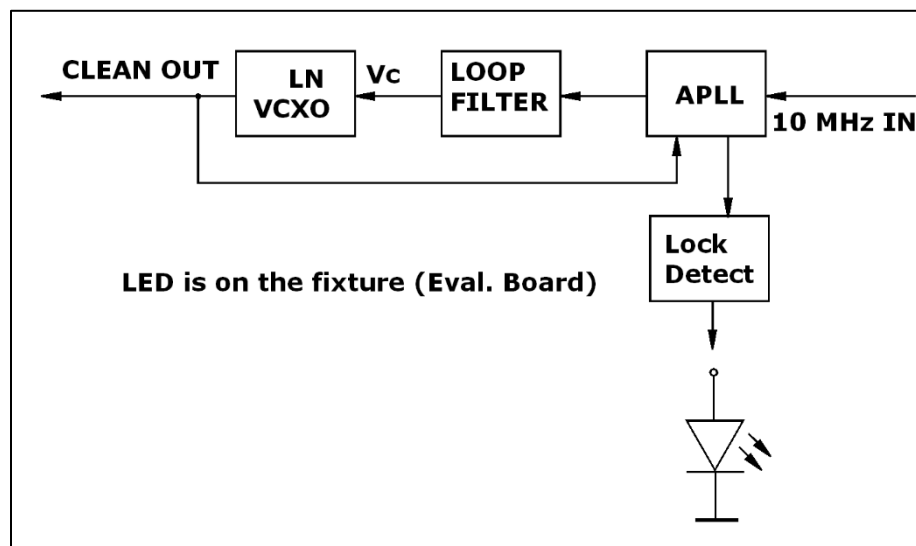

Creating a Part Number

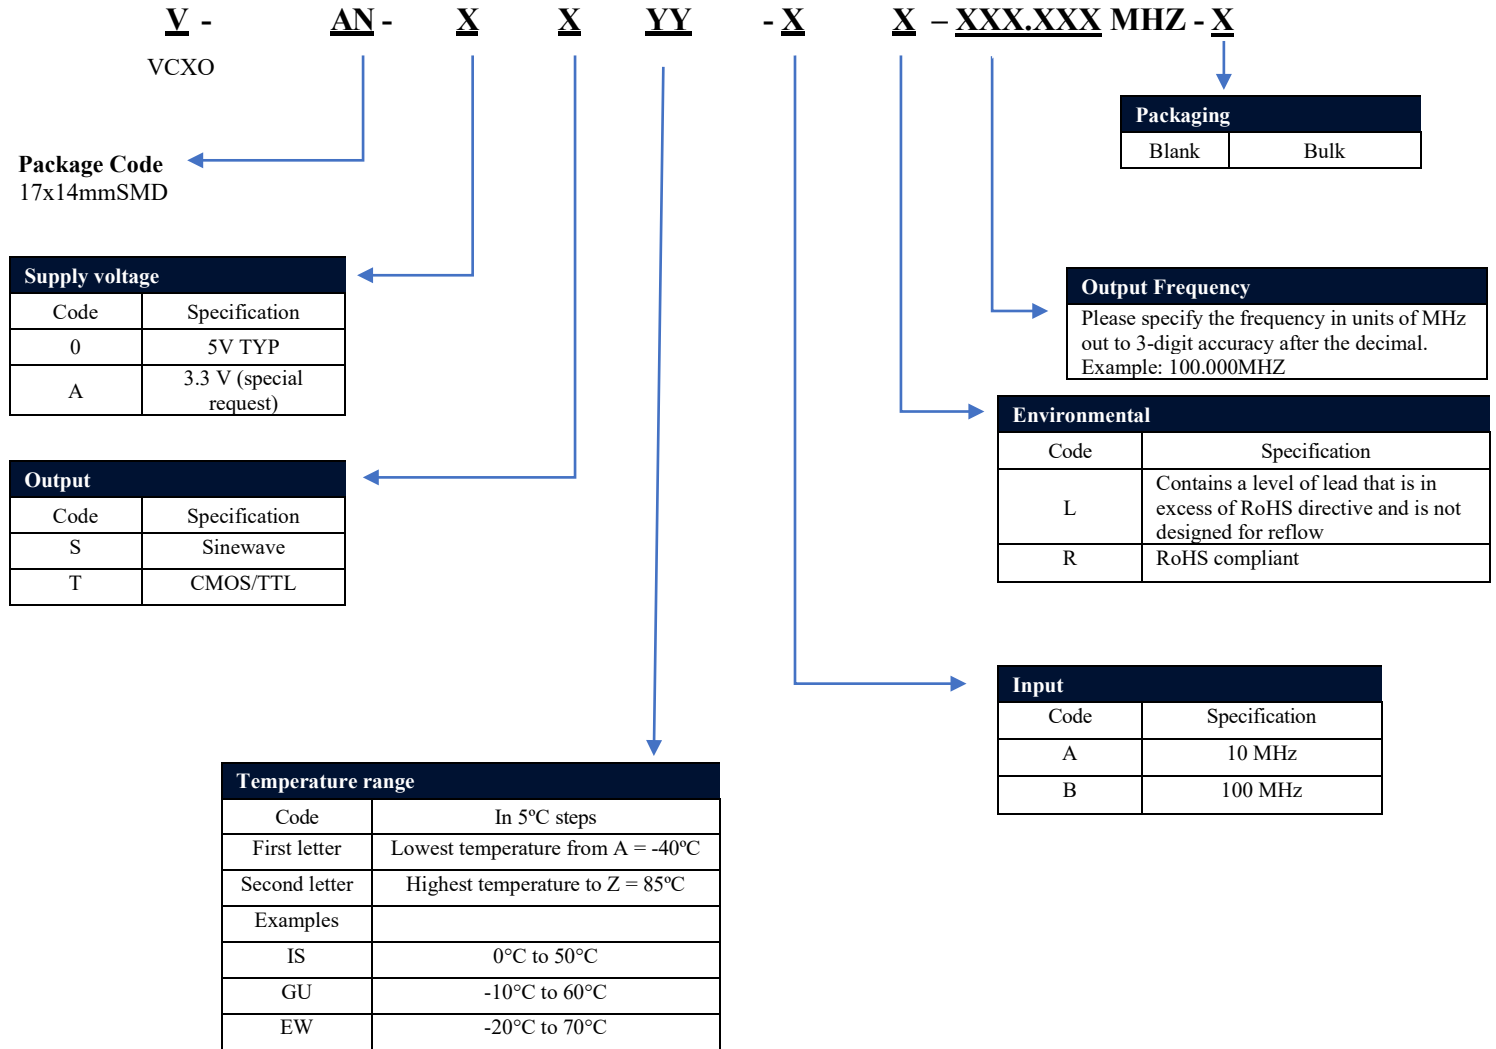

Not all combinations are available. Consult Factory.




Temperature Code Table

Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C
A	-40	F	-15	K	10	P	35	U	60	Z	85
B	-35	G	-10	L	15	Q	40	V	65		
C	-30	H	-5	M	20	R	45	W	70		
D	-25	I	0	N	25	S	50	X	75		
E	-20	J	5	O	30	T	55	Y	80		


Notes:

1). All parameters, unless otherwise specified, are at nominal conditions, ie: T=25°C, Nominal Vcc & Nominal

Mechanical Dimensions

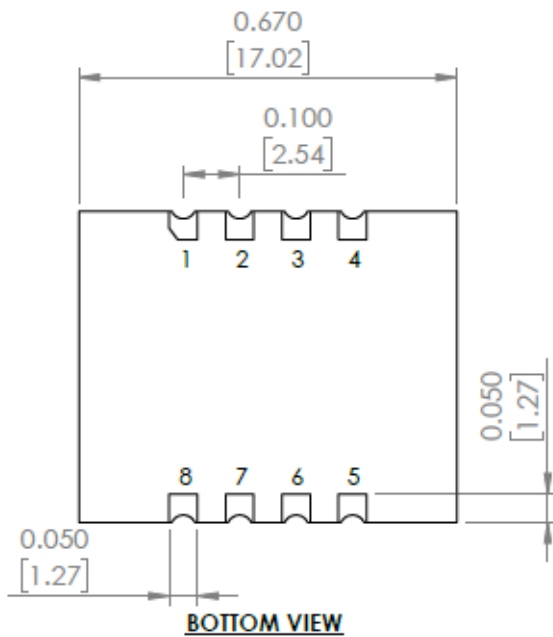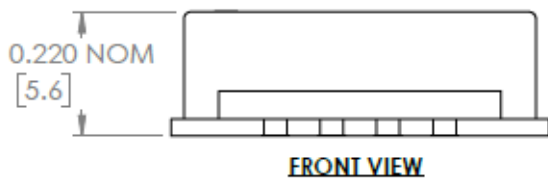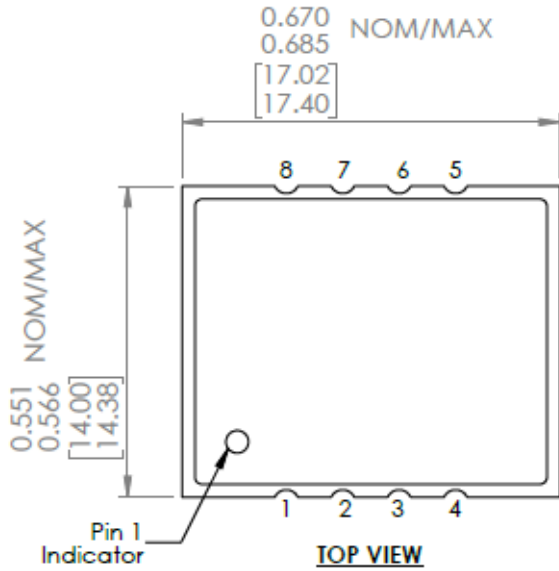

Recommended Land Pattern

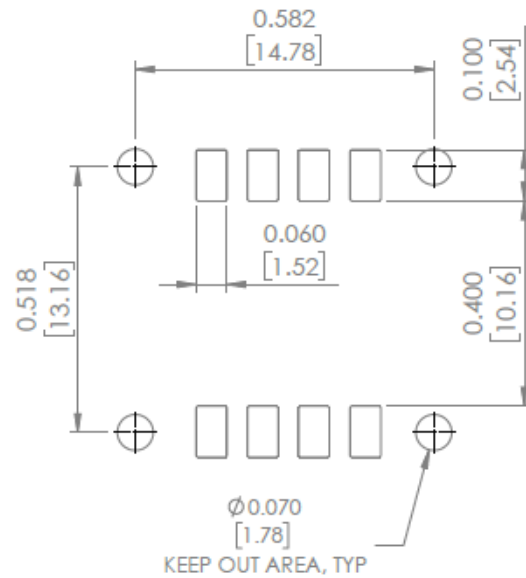

Pin #	Function
1	Vcc
2	GND
3	GND
4	GND
5	RF OUT
6	Do Not Connect
7	10 MHz In
8	Lock Detect

Dimensions: inches [mm]



Reflow Profile [JEDEC J-STD-020]

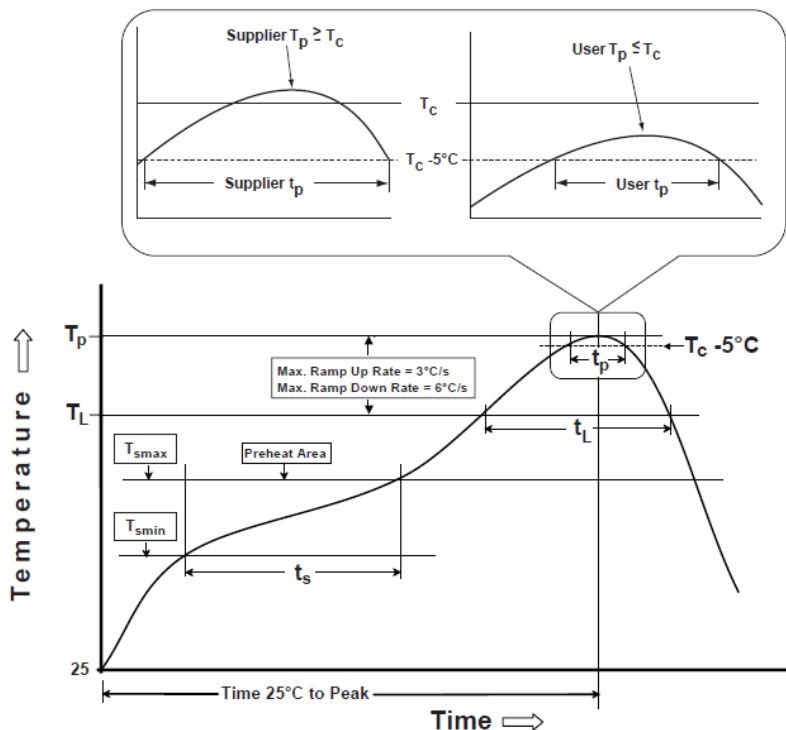


Table 1

SnPb Eutectic Process Classification Temperatures (T_c)		
Package Thickness	Volume mm^3 <350	Volume mm^3 \geq 350
<2.5 mm	235°C	220°C
\geq 2.5 mm	220°C	220°C

Table 2

Pb-Free Process Classification Temperatures (T_c)			
Package Thickness	Volume mm^3 <350	Volume mm^3 350-2000	Volume mm^3 >2000
<1.6 mm	260°C	260°C	260°C
1.6 mm - 2.5 mm	260°C	250°C	245°C
>2.5 mm	250°C	245°C	245°C

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat / soak		
Temperature minimum (T_{smin})	100°C	150°C
Temperature maximum (T_{smax})	150°C	200°C
Time (T_{smin} to T_{smax}) (t_s)	60 - 120 sec.	60 - 120 sec.
Average ramp-up rate (T_{smax} to T_p)	3°C/sec. max	3°C/sec. max
Liquidous temperature (T_L)	183°C	217°C
Time at liquidous (t_L)	60 - 150 sec.	60 - 150 sec.
Peak package body temperature (T_p)*	see Table 1	see Table 2
Time (t_p)** within 5°C of the specified classification temperature (T_c)	20 sec.	30 sec.
Ramp-down rate (T_p to T_{smax})	6°C/sec. max	6°C/sec. max
Time 25°C to peak temperature	6 min. max	8 min. max
Reflow cycles	1 max	1 max

*Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

**Tolerance for time at peak profile temperature (t_p) is defined as supplier minimum and a user maximum.